

Patent pending* **ArgoEdgeSealPLUS®** is designed for laminators to seal the edges of multi-layer glass composites. This next generation edge seal has a foil layer offering the ultimate in properties:

- Provides dramatically enhanced moisture and solvent resistance.
- Minimizes composite layer damage from solvents contained in caulks, sealants and cleaning solutions.
- Helps protect the edge of glass laminates from chipping and other minor damage.
- Creates an aesthetically pleasing appearance on the laminate edge.

ArgoEdgeSealPLUS is available in a large variety of standard widths. Custom-slit widths are available upon request. Master rolls, 40-inches (1 m) wide by 120-feet (36.5 m) long, may be purchased.

* Patent number 12/714,569.


PHYSICAL PROPERTIES

Property	Test Method	Value
Adhesive layer melt index	ASTM D-1238	5g/10 min. @ 350°F (177°C)
Average peel	ASTM D-3167	>150 pli
Permeation (method)	Material Tested	g/m ² -week
Moisture ASTM F-1249	BOC-9450 Edge Seal	250
	ArgoEdgeSealPLUS	1.2
Solvent-MEK ASTM E-96B	BOC-9450 Edge Seal	20
	ArgoEdgeSealPLUS	2

STORAGE AND HANDLING

ArgoEdgeSealPLUS has a one-year shelf life from date of shipment when stored in the original packaging under dry conditions below 90°F (32°C).

HOW IT WORKS

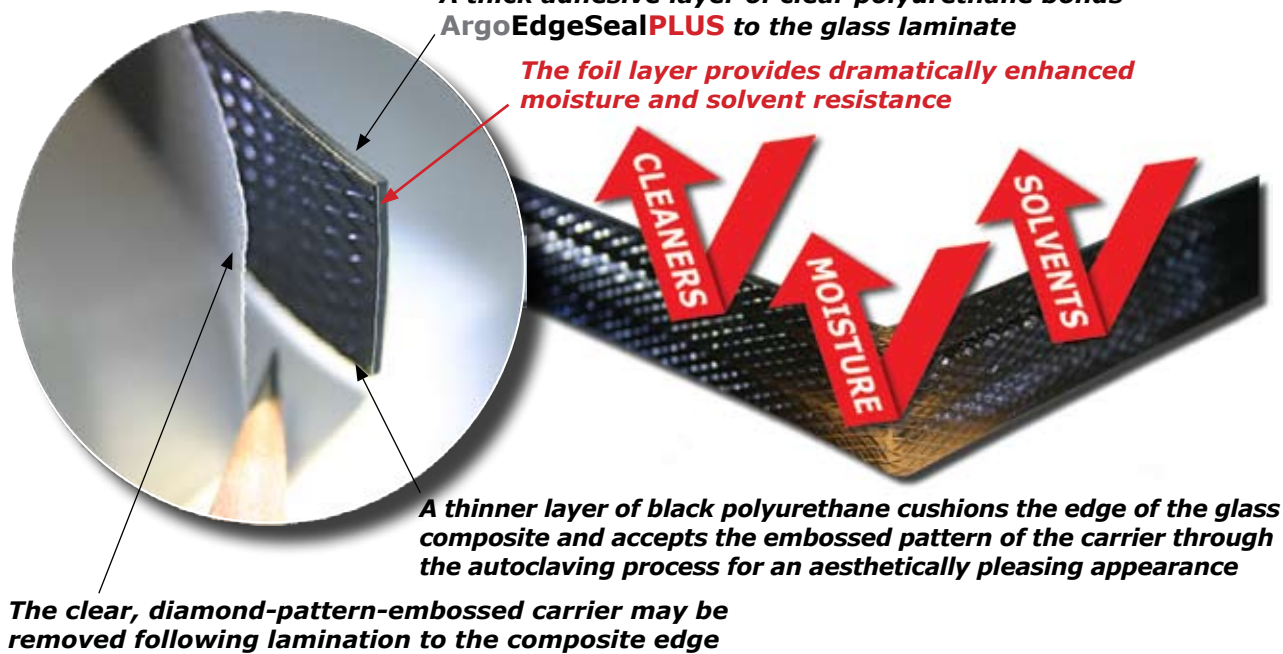

All statements, product characteristics, and performance data contained herein are believed to be reliable based on observation and testing, but no representations, guarantees, or warranties of any kind are made as to accuracy, suitability for particular applications, or the results to be obtained. Nothing contained herein is to be considered to be permission or a recommendation to use any proprietary process or technology without permission of the owner. No warranty of any kind, expressed or implied, is made or intended.